

KLCRANES.INC

2717 SYLVAIN ST ROCKLAND, ON, K4K1S6, CANADA
PHONE/FAX 1-855-888-1894



REMOTE CONTROL F21-2D

2 Button double step system that comes with 1 receiver + 1 Transmitter
(with a control voltage of 24/48/110/220/380 VAC 12/24 VDC)

GENERAL SPECIFICATION

Typical application :
Hoist, winches, lifts, doors,
Operating Distance: 150feet
Frequency: 310 Mhz band
Frequency generation: Crystal
(plug in)
Security coding: 4.3 billion unique
ID code
Environmental rating: IP 65
Licensing: FCC certified, no
licences needed. FCC identifier
2384AF212S
Warranty : 2 years
Temperature rating:
-35 deg C a 75 deg C (-31 deg F a
167 deg F

RECEVEIR SPECIFICATION

Size: W 3.37"x D 7.10" xL 3.5"
Parts : F21-2D-RX
Power standards:
110/220 VAC
Power available:
24/48/110/220/380 VAC 12/24 VDC
Relay rating :
10 Amp/250 V AC
Weight : 3 Lbs
Includes: Pre-cabled
Accessories available:
Exterior antenne
Horn

TRANSMITTER SPECIFICATIONS

Parts : F21-2D-TX
Transmitters: 1 supplied standard
Size: W 1.75" x D .9" x L 5.2"
Weight: 5 ounces
Matériel: Shock resistant, fiber
reinforced nylon
Power source: 2 AA alkaline batteries
Battery power indication : LED
Buttons: 2 programmable, 2 double step
plus start and stop. Rated to 2 million
cycles **Start key:** Setting buttons
Stop Button: Key magnetic

F21•2D

(BLACK) POWER 1
110VAC Standard

(BROWN) POWER 2

(ORANGE) COM


(RED) MAIN

(YELLOW) UP 1S

(GREEN) UP 2S

(BLUE) DOWN 1S

(PURPLE) DOWN 2S

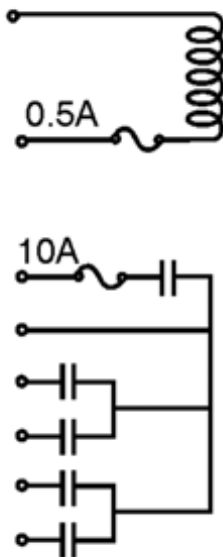

WHY BUYING TELECRANE?

- Quality-price relationship unattainable
- Quick and efficient service, contained prices of spare parts
- Iso 9001 certified production
- Ready delivery for the entire set of products
- Rapidity of installation, receiver with wire cable
- Test of every product provided with its relative certificate
- Contained weight and sizes, friendly use