

KLCRANES.INC

2717 SYLVAIN ST ,ROCKLAND,ON,K4K1S6,CANADA
 PHONE/FAX 1-855-888-1894

**REMOTE CONTROL F21-2S small**

2 Button single step system that comes with 1 receiver +1 Transmitter
 (with a control voltage of 24/48/110/220/380 VAC 12/24 VDC)

GENERAL SPECIFICATION

Typical application :
 Hoist, winches, lifts, doors,
Operating Distance: 150feet
Frequency: 310 Mhz band
Frequency generation: Crystal
 (plug in)
Security coding: 4.3 billion unique
 ID code
Environmental rating: IP 65
Licensing: FCC certified, no
 licences needed. FCC identifier
 2384AF212S
Warranty : 2 years
Temperature rating:
 -35 deg C a 75 deg C (-31 deg F a
 167 deg F

RECEVEIR SPECIFICATION

Size: W 3.37"x D 7.10" xL 3.5"
Parts : F21-2S-RX
Power standards:
 110/220 VAC
Power available:
 24/48/110/220/380 VAC 12/24 VDC
Relay rating :
 10 Amp/250 V AC
Weight : 3 Lbs
Includes: Pre-cabled
Accessories available:
 Exterior anten
 Horn

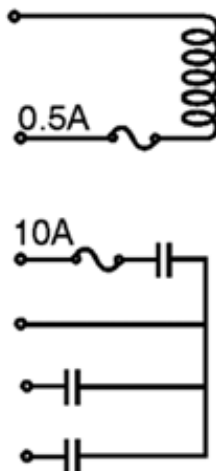
TRANSMITTER SPECIFICATIONS

Parts : F21-2S-TX
Transmitters: 1 supplied standard
Size: W 1.75" x D .9" x L 5.2"
Weight: 5 ounces
Matériel: Shock resistant, fiber
 reinforced nylon
Power source: 2 AA alkaline batteries
Battery power indication : LED
Buttons: 2 programmable, 2 step plus
 start and stop. Rated to 2 million cycles
Start key: Setting buttons
Stop Button: Key magnetic

F21•2S

(BLACK) POWER 1
 110VAC Standard
 (WHITE) POWER 2

(ORANGE) COM
 (RED) MAIN
 (YELLOW) UP
 (BLUE) DOWN

**WHY BUYING TELECRANE?**

Quality-price relationship
 unattainable

Quick and efficient service,
 contained prices of spare parts

Iso 9001 certified production

Ready delivery for the entire set of
 products

Rapidity of installation, receiver
 with wire cable

Test of every product provided with
 its relative certificate

Contained weight and sizes,
 friendly use